

DYWIDAG Prestressing Systems using Bars



Contents

ETA Approvals	4
System description	5
Prestressing Bars / Technical Data	6
System overview.....	7
Overview of anchorages	8
Applications.....	9
Overview of bonded bar tendons	10
Overview of unbonded and external bar tendons	11
Geometrical characteristics of accessories	12
Installation	13
Stressing and grouting.....	14
Equipment for stressing and grouting	15



ÖSTERREICHISCHES INSTITUT FÜR BAUTECHNIK
 AUSTRIAN INSTITUTE FOR CONSTRUCTION TECHNOLOGY
 Member of EOTA

European Technical Approval ETA-03/0036
 English translation, the original version is in German

Herstellerbezeichnung
Trade name: **SUSPAQIS - Monolithenverankerungen ohne Verbund mit 1 bis 5 Monolithen**
SUSPAQIS - Unbonded Monolith System with 1 to 5 Monoliths

Zulassungsinhaber
Holder of Approval: **DIWIDAG-Systeme International GmbH**
 Dyrwickstraße 1
 85019 Aschheim
 Deutschland

Zulassungsgegenstand und Verwendungszweck
General type and use of construction product: **Spannsystem für das Vorspannen von Tragwerken mit Monolithen ohne Verbund für Beton**
 Post-tensioning system for prestressing of structures with unbonded monoliths for concrete

Geltungsdauer
Validity: **von 01.04.2009 bis 31.03.2016**

Hersteller
Manufacturing plant: **DIWIDAG-Systeme International GmbH**
 Modulareisen Langenfeld
 Max-Planck-Ring 1
 40764 Langenfeld
 Deutschland

Dieses Europäische Technische Zulassung enthält
This European Technical Approval contains: **36 Seiten, einschließlich 14 Anhängen**
 36 pages, including 14 Annexes

Dieses Europäische Technische Zulassung ersetzt
This European Technical Approval replaces: **ETA-03/03/96 mit Geltungsdauer vom 01.04.2004 bis zum 31.03.2009**
 ETA-03/03/96 with validity from 01.04.2004 to 31.03.2009

EOTA European Organisation for Technical Approvals
 Europäische Organisation für Technische Zulassungen
 Organisation Européenne pour l'Agrement technique

ÖSTERREICHISCHES INSTITUT FÜR BAUTECHNIK
 AUSTRIAN INSTITUTE FOR CONSTRUCTION TECHNOLOGY
 Member of EOTA

European technical approval ETA-05/0123
 English translation, the original version is in German

Herstellerbezeichnung
Trade name: **DIWIDAG - Spannsystem**
DIWIDAG - Post-tensioning for concrete system

Zulassungsinhaber
Holder of Approval: **DIWIDAG-Systeme International GmbH**
 Dyrwickstraße 88
 85019 München
 Deutschland

Zulassungsgegenstand und Verwendungszweck
General type and use of construction product: **Spannsystem für das Vorspannen von Tragwerken, System mit und ohne Verbund sowie Stahl, Stahlbeton, Gussbeton und unbonded steel external**

Geltungsdauer
Validity: **von 14.11.2011 bis 18.09.2015**

Hersteller
Manufacturing plant: **DIWIDAG-Systeme International GmbH**
 Max-Planck-Ring 1
 40764 Langenfeld
 Deutschland

Dieses Europäische Technische Zulassung enthält
This European technical approval contains: **78 Seiten einschließlich 29 Anhänge**
 78 pages including 29 Annexes

Dieses Europäische Technische Zulassung ersetzt
This European technical approval replaces: **ETA-05/0123 mit Geltungsdauer vom 18.09.2010 bis 18.09.2015**
 ETA-05/0123 with validity from 18.09.2010 to 18.09.2015

EOTA European Organisation for Technical Approvals
 Europäische Organisation für Technische Zulassungen
 Organisation Européenne pour l'Agrement technique

Deutsches Institut für Bautechnik
 German Institute for Construction Technology
 Member of EOTA

European Technical Approval ETA-06/0022
 English translation prepared by DIBt - Original version in German language

Herstellerbezeichnung
Trade name: **DIWIDAG-Laserspannsystem mit nachträglichem Verbund**
DIWIDAG Bonded Strand Post-tensioning System

Zulassungsinhaber
Holder of Approval: **DIWIDAG-Systeme International GmbH**
 Dyrwickstraße 88
 85019 München
 DEUTSCHLAND

Zulassungsgegenstand und Verwendungszweck
General type and use of construction product: **DIWIDAG-Laserspannsystem mit 3 bis 27 Lasern (140 und 150 mm) zur Vorspannung mit nachträglichem Verbund**
 Dyrwick Bonded Strand post-tensioning System for 3 to 27 strands (140 and 150 mm)

Geltungsdauer
Validity: **von 13. January 2011 bis 13. January 2016**

Hersteller
Manufacturing plant: **DIWIDAG-Systeme International GmbH**
 Max-Planck-Ring 1
 40764 Langenfeld
 DEUTSCHLAND

Dieses Zulassung enthält
This Approval contains: **42 Seiten einschließlich 27 Anhänge**
 42 pages including 27 Annexes

Dieses Zulassung ersetzt
This Approval replaces: **ETA-06/0022 mit Geltungsdauer vom 12.01.2006 bis 12.01.2011**
 ETA-06/0022 with validity from 12.01.2006 to 12.01.2011

EOTA Europäische Organisation für Technische Zulassungen
 European Organisation for Technical Approvals

Construction products with an European Technical Approval (ETA) meet all essential demands given in the Construction Products Directive (CPD). The ETA holder is authorized to apply the CE-marking (Conformité Européenne) on his product. The CE-marking certifies the conformity with the technical specification and is the basis for the free movement of goods within the EU member states. DSI is proud to have European Technical Approvals for its PT-systems with bars, bonded strands and unbonded strands.

System Description



Typical Coupling, Uhlavu Bridge, Pilsen, Czech Republic

DYWIDAG Prestressing Systems are world renowned for reliability and performance, most suitable for all applications in post-tensioned and prestressed constructions. They embrace the whole spectrum from bridge construction, buildings, to civil applications, above and underground.

The first ever structure built with a prototype DYWIDAG Post-Tensioning System using bars was the arch-bridge Alsleben (Germany) in 1927. From that time on DYWIDAG has continuously improved its systems to keep up with the growing demand of modern construction technology. In addition to the traditional post-tensioning system using bars, that is mainly geared towards geotechnical applications, building rehabilitation and strengthening, DSI offers a complete product line in strand prestressing (bonded, unbonded and external) as well as stay-cables being able to fully serve the post-tensioning construction. DYWIDAG Prestressing Systems have always combined highest safety and reliability standards with most economical efficiency in their research and development. Dependable corrosion protection methods of the DYWIDAG Prestressing Systems contribute to the longevity of modern construction. High fatigue resistance is achieved with optimized material selection and cautious detailing of all the components especially in their system assembly.

The post-tensioning system for the prestressing of structures with bars (internal bonded, unbonded and external tendons) is regulated in European Technical Approval ETA-05/0123. This ETA can be downloaded at: <http://www.dywidag-systems.com/emea/downloads/dsi-approvals/european-approvals.html>

Ground anchors of up to 47 mm are provided for geotechnical applications. Additionally, DSI USA provides DYWIDAG Prestressing Systems with 65 and 75 mm threadbars.

Internal bar tendons are mainly used in concrete, composite and masonry structures. Internal unbonded and external bar tendons are used for concrete, composite, steel, timber and masonry structures. Typical applications are transversal prestressing, strengthening of bridges, rehabilitations, connection elements for steel structures and machines and temporary applications.



Uhlavu Bridge, Pilsen, Czech Republic

Advantages and Characteristics

- Easy system handling
- Robust design
- Flexible transport length due to couplers
- Also applicable for (very) short tendons due to little slip
- Used in new structures and for strengthening of existing structures
- Suitable as longitudinal or transversal tendons
- Usable as shear reinforcement
- Usable as straight or curved tendons
- Can be used as hangers for concrete or steel arch bridges
- Usable for the temporary or permanent connection of precast concrete elements
- Many combination of any structural material are possible (such as steel with concrete)
- Preassembled unbonded or external tendons with permanent corrosion protection are available

Prestressing Bars and Technical Data

General

The prestressing bars are hot-rolled, tempered from the rolling heat, stretched and annealed, with a circular cross section.

The bars are of prestressing steel Y 1050 H according to prEN 10138-4.

The threadbars and plain bars are available in mill length up 18 m and may be cut to specified lengths before shipment to the jobsite.

Threadbars

Threadbars are available in diameters 17.5, 26.5, 32, 36, 40 and 47 mm.

The threadbars feature continuous hot-rolled ribs providing a right-handed thread along the entire length.

The threadbar can be cut anywhere and is threadable without further preparation.

The threadbars are specified by nominal diameter and WR, e.g. 26 WR



Plain bars

Plain bars are available in diameters 32 and 36 mm.

Both ends of a plain bar cut to the length specified in the project are provided with special cold-rolled threads.

The thread lengths are manufactured in the shop according to the specifications of the project.

The plain bars are specified by nominal diameter and WS, e.g. 32 WS.



Technical data

Designation			THREADBAR®						Plain bar	
			18 WR	26 WR	32 WR	36 WR	40 WR	47 WR	32 WS	36 WS
Nominal diameter	d_s	[mm]	17.5	26.5	32	36	40	47	32	36
Cross section area	S_n	[mm ²]	241	552	804	1,018	1,257	1,735	804	1,018
Nominal mass per metre¹	M	[kg/m]	1.96	4.48	6.53	8.27	10.20	14.10	6.31	7.99
Pitch	c	[mm]	8	13	16	18	20	21	3	3
Characteristic breaking load	F_m	[kN]	255	580	845	1,070	1,320	1,820	845	1,070
Max. initial stressing force² $P_{m0,max} = S_n \times 0,8 \times f_{p,k}$		[kN]	204	464	676	856	1,056	1,457	676	856
Max. overstressing force³ $P_{0,max} = S_n \times 0,95 \times f_{p0,1k}$		[kN]	219	499	722	912	1,131	1,566	722	912

¹The nominal mass per metre includes 3.5% not load bearing portion of ribs.

²The given values are maximum values according to Eurocode 2, i.e. $\min(k_1 \times f_{pk}, k_2 \times f_{p0,1k})$ applies. The fulfillment of the stabilization criteria and the requirements for cracks width in the load transfer tests were verified at $0.8 \times F_{pk}$.

$F_{pk} = S_n \times f_{pk}$


$F_{p0,1k} = S_n \times f_{p0,1k}$

³Overstressing is permitted if the force in the prestressing jack can be measured to an accuracy of $\pm 5\%$ of the final value of the prestressing force.

System Overview

Available tendons	Anchor plate	18 WR	26 WR	32 WR	36 WR	40 WR	47 WR	32 WS	36 WS
Bonded bar tendon with QR-plate anchorage with additional reinforcement	2074		■	■	■	■			■
Bonded bar tendon with small solid rectangular plate anchorage with additional reinforcement	2076	■	■	■	■	■	■	■	■
Bonded bar tendon with QR-plate anchorage without additional reinforcement	2074		■	■	■	■			■
Bonded bar tendon with small solid rectangular plate anchorage without additional reinforcement	2076	■	■	■	■	■	■	■	■
Bonded bar tendon with small solid square plate anchorage without additional reinforcement	2011	■	■	■	■	■	■	■	■
Bonded bar tendon with solid rectangular plate anchorage with additional reinforcement	2012	■	■	■	■	■	■	■	■
Unbonded and external bar tendon with solid square plate anchorage without additional reinforcement	2011	■	■	■	■	■	■	■	■
Unbonded and external bar tendon with solid rectangular plate anchorage with additional reinforcement	2012	■	■	■	■	■	■	■	■



⁴ Hex nuts 2002 are not included in ETA-05/0123.

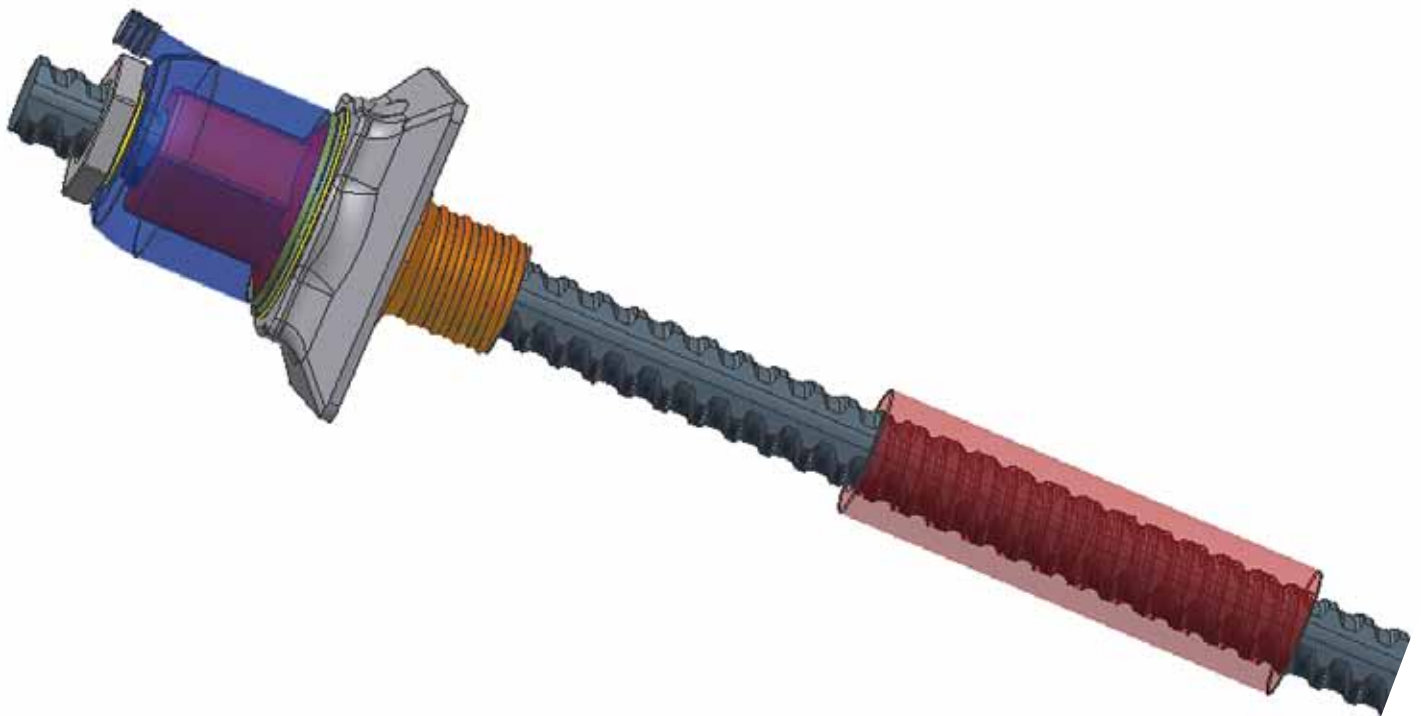

Overview of Anchorages

Stressing anchorage, bonded

The bar is fixed with the domed anchor nut and the retaining nut to the anchorage plate and this latter will be fixed to the scaffolding. The retaining nut provides the connection to the duct. Grouting is performed through the grout cap, the domed anchor nut with the three grout slots and the retaining nut.

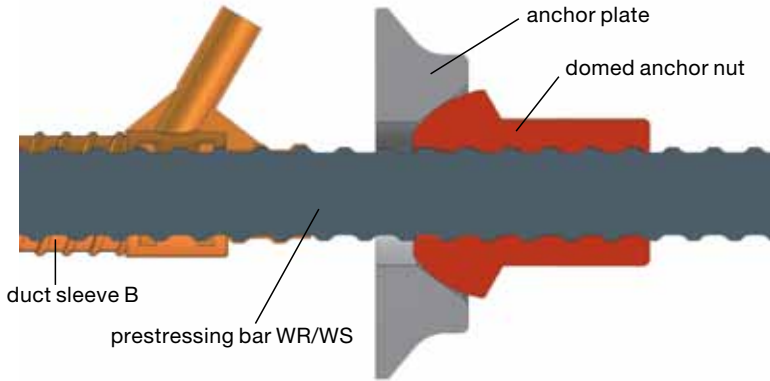
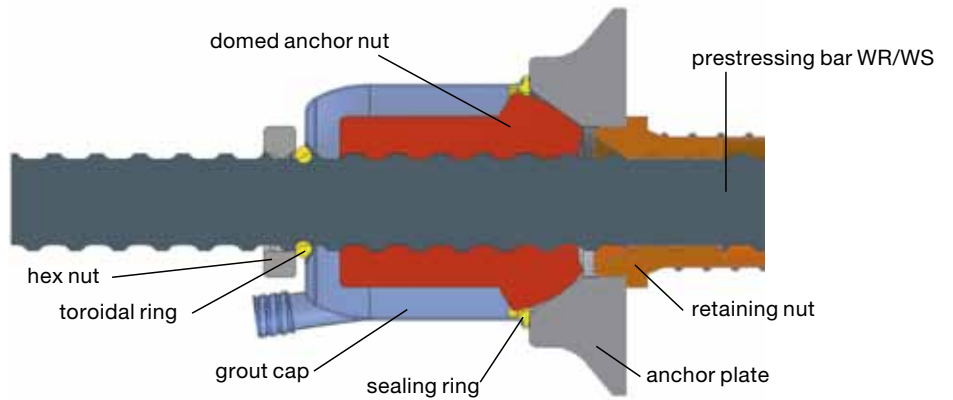


Fixed anchorage, bonded

The fixed anchorage is mostly completely embedded in the concrete. The domed anchor nut is tack welded perpendicularly onto the anchor plate. The duct sleeve B ends directly at the anchor plate the duct will be injected respectively vented there. A fixed anchorage can be designed as a stressing anchorage; the required bar-over length for the stressing can be dispensed.

Stressing anchorage, unbonded

Against water intrusion in the anchorage region a connection tube is welded to the anchor plate for bridging of a gap behind the anchor plate. Different corrosion protection systems are available.

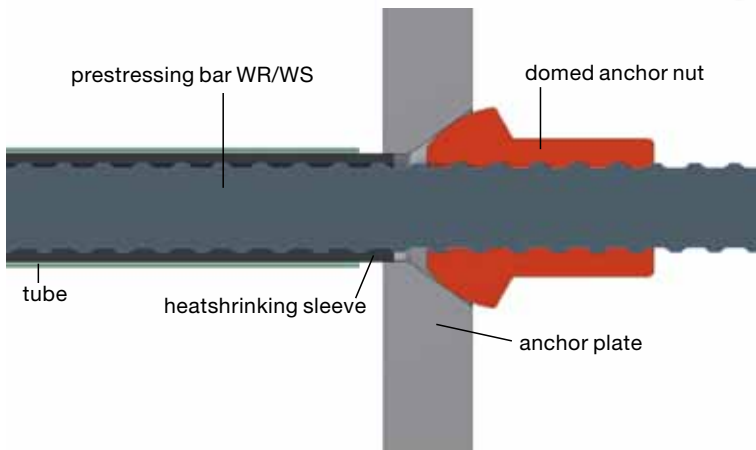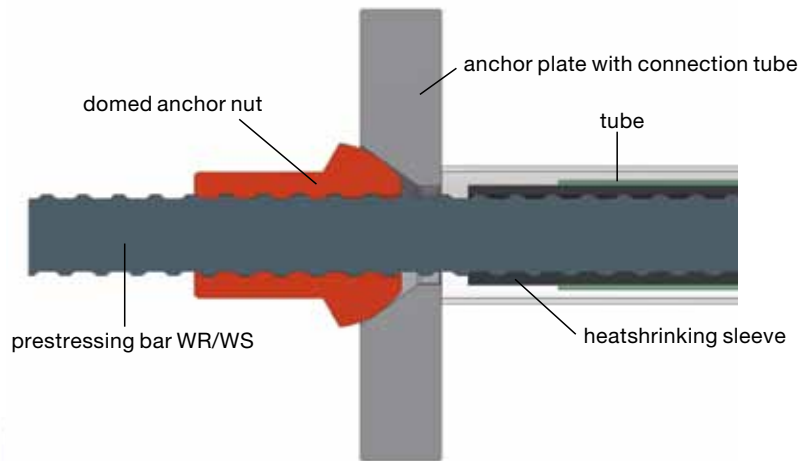

Fixed anchorage, unbonded

The fixed anchorage is mostly completely embedded in the concrete. The domed anchor nut is tack welded perpendicularly onto the anchor plate. The prestressing bar will be provided with the respective corrosion protection. The fixed anchorage can be carried out as an unbonded stressing anchorage, too.

Applications

Prestressing bar tendons can be used at new structures and for strengthening of existing structures, as longitudinal or transversal tendons, as shear reinforcement, straight or curved, as hangers at concrete or steel arch bridges, for temporary or permanent

connections of precast concrete elements, fixations of concrete to concrete, new concrete to old concrete, steel to concrete, concrete to masonry or any combination of members made of any structural material.



Grand-Mère Generating Station, Canada




Church of Our Lady, Germany

Overview Bonded Bar Tendons

Bonded bar tendons are embedded in concrete. The corrosion protection of the prestressing steel and the bond with the structural concrete is provided by grout injected in the ducts.

A bonded tendon is intended to be used for concrete, composite and masonry structures.

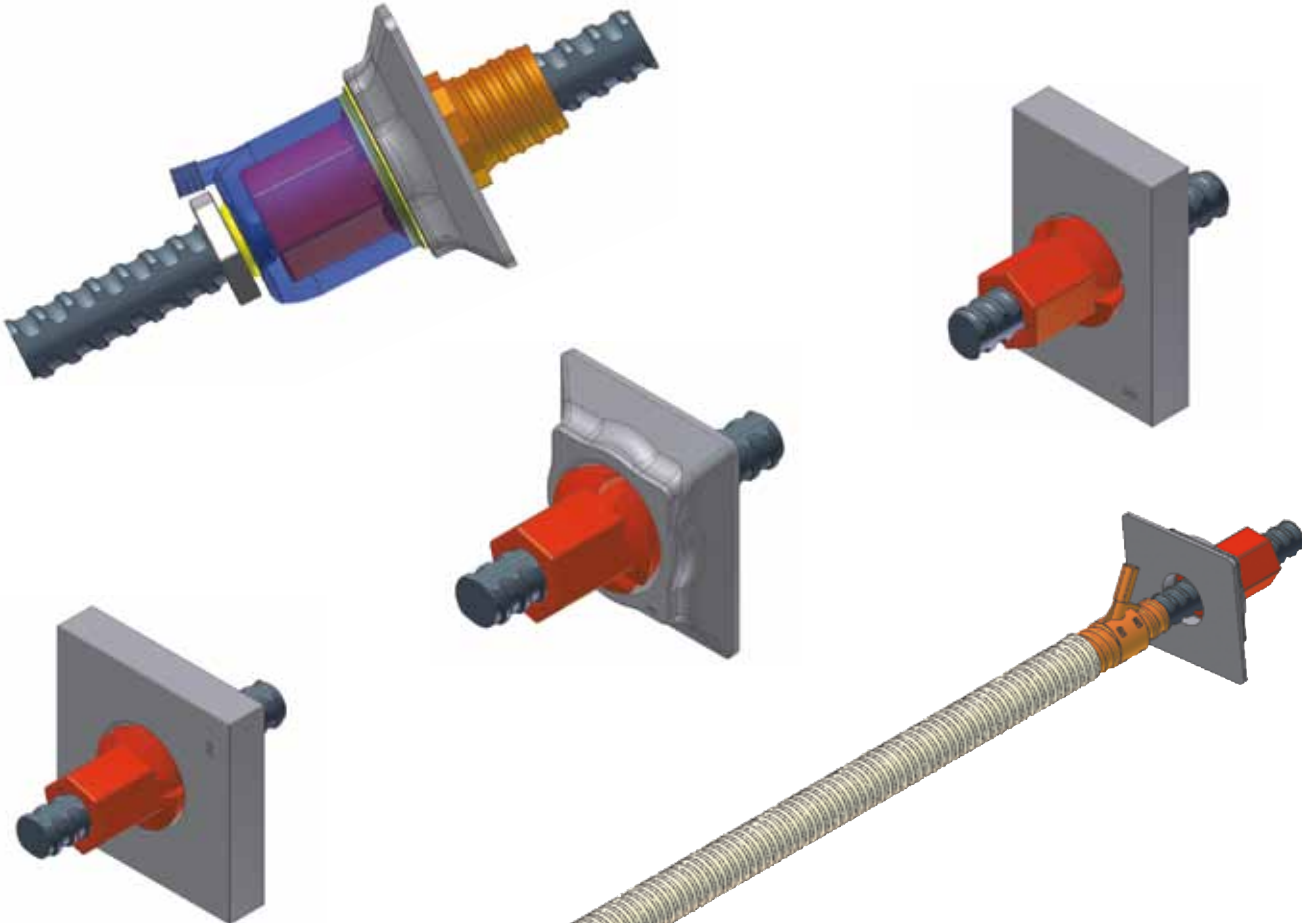

Bonded bar tendon, design QR-plate, square and rectangular solid plates

Overview Unbonded and External Bar Tendons


Unbonded and external bar tendons are installed either inside or outside the cross section of the structure. For corrosion protection various systems are available, all of which do not bond with the structure. The tendons may be

restressed at any time and depending on the tendon type, they can also be removed or exchanged.

Internal unbonded and external tendons are intended to be used for concrete,


composite, steel, timber and masonry structures.

The corrosion protection of unbonded and external tendons depends on an environmental conditions and service time.

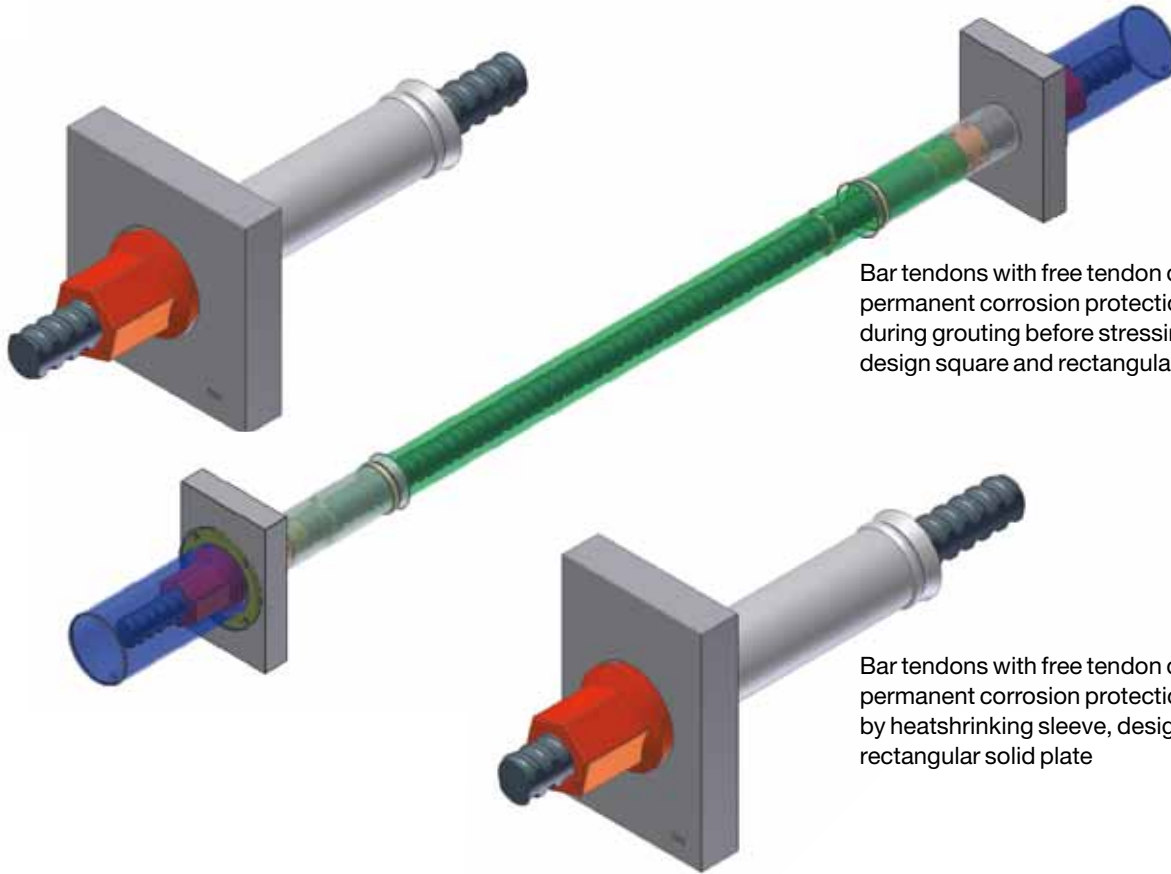

Bar tendons with free tendon duct, permanent corrosion protection executed during grouting before stressing, design square and rectangular solid plates

Bar tendons with free tendon duct, permanent corrosion protection executed by heatshrinking sleeve, design square and rectangular solid plate

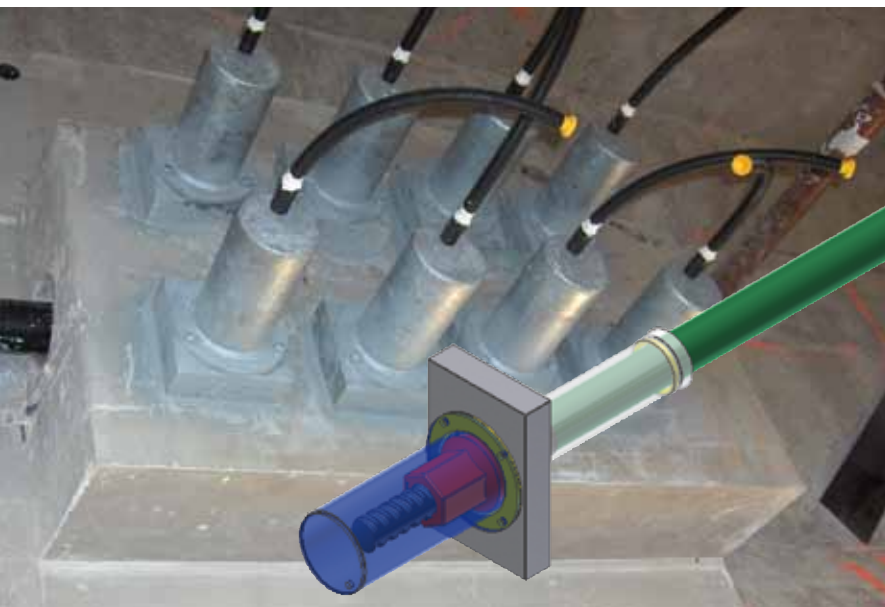

Overview of Corrosion Protection Systems


Corrosion protection for	Temporary corrosion protection ≤ 3 years	Tendon <u>with</u> free tendon duct				Tendon <u>without</u> free tendon duct	
		Permanent corrosion protection				Permanent corrosion protection	
Threadbar Plain bar	coating	grouting with cement grout before stressing (installation)	grouting with cement grout after stressing	heatshrinking sleeve or corrosion protection tape	corrosion protection compound	heatshrinking sleeve or corrosion protection tape	corrosion protection compound
	coating acc. to EN ISO 12944-5 with protection tube (PE)	cement grout with protection tube (PE or steel)	cement grout with protection tube (PE or steel)	heatshrinking sleeve or corrosion protection tape with protection tube (PE or steel)	protection tube (PE), void grout with corrosion protection compound	heatshrinking sleeve or corrosion protection tape with protection tube (PE or steel)	corrosion protection tape with protection tube (PE)
Anchorage, range of connection tube	corrosion protection compound or tape	sealing ring plus corrosion protection compound tape	sealing ring plus grout	sealing ring or heatshrinking sleeve plus corrosion protection compound or tape	sealing ring or heatshrinking sleeve plus corrosion protection compound	sealing ring or heatshrinking sleeve plus corrosion protection compound or tape	sealing ring or heatshrinking sleeve plus corrosion protection compound
Anchorage, range of anchor nut	corrosion protection compound or tape	corrosion protection compound or tape or grout	corrosion protection compound or tape or grout	corrosion protection compound or tape	corrosion protection compound	corrosion protection compound or tape	corrosion protection compound
	cap, PE or steel	cap, PE or steel				cap, PE or steel	
Coupler	heatshrinking sleeve	tubes (PE or steel) with transition pieces, sealed with heatshrinking sleeve or tape, filled with corrosion protection compound or tape or grout				tube with transition pieces, filled with corrosion protection compound	



Overview of Tensioning Jacks for Prestressing Tendons

Bar designation	THREADBAR®						Plain bar	
	18 WR	26 WR	32 WR	36 WR	40 WR	47 WR	32 WS	36 WS
60 Mp	x	x	x ¹				x ¹	
110 Mp		x	x	x	x		x	x
200 Mp						x		

¹ stressing force limited to 625 kN max.

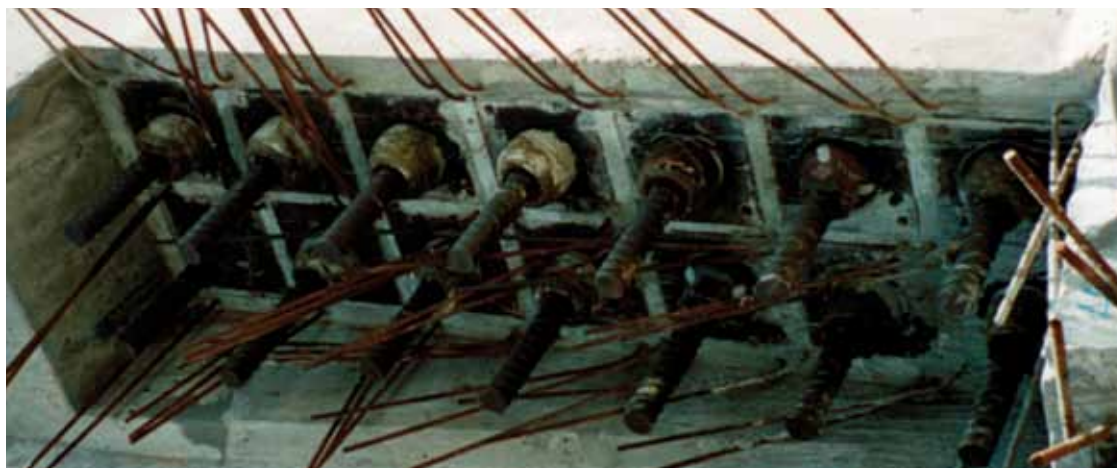


Geometrical Characteristics of Accessories

Bar designation				THREADBAR®						Plain bar	
				18 WR	26 WR	32 WR	36 WR	40 WR	47 WR	32 WS	36 WS
Domed Anchor Nut	2099	length	[mm]	55	75	90	100	115	135	46	60
		width across flat	[mm]	36	50	60	65	70	80	55	65
Hex nut ⁴	2002	length	[mm]	60	80	90	110	120	140	55	80
		width across flat	[mm]	41	46	55	60	70	80	55	60
Coupler (Standard)	3003	length	[mm]	100	170	200	210	245	270	110	160
		outside diameter	[mm]	36	50	60	68	70	83	60	68
Square Solid Plate	2011	width	[mm]	110	150	180	200	220	260	180	200
		length	[mm]	110	150	180	200	220	260	180	200
		thickness	[mm]	25	35	40	45	45	50	40	45
Rectangular Solid Plate (Unbonded and Bonded)	2012	width	[mm]	100	130	140	150	160	200	140	150
		length	[mm]	130	150	180	220	250	280	180	220
		thickness	[mm]	30	35	40	50	60	60	40	50
Rectangular Solid Plate (Bonded)	2076	width	[mm]	80	120	140	160	180	210	140	160
		length	[mm]	90	130	165	180	195	235	165	180
		thickness	[mm]	25	30	35	40	45	55	35	40
QR-Plate	2074	width	[mm]	-	120	140	160	180	-	-	160
		length	[mm]	-	130	165	180	195	-	-	180
		thickness	[mm]	-	30	35	40	45	-	-	40
Corrugated Duct	4061	internal diameter	[mm]	25	38	44	51	55	65	44	51
		outside diameter	[mm]	30	43	49	56	60	70	49	56
Minimum Bar Protrusion at stressing anchorage			[mm]	60	75	90	100	115	135	46	60

⁴ Hex nuts 2002 are not included in ETA-05/0123.

Installation

DYWIDAG-Systems International offers a full line of special installation accessories to facilitate field assembly and installation. Installation shall be carried out by properly trained and experienced personnel. Tendons can be delivered to the jobsite prefabricated when desired (e.g. unbonded bar tendon), too.

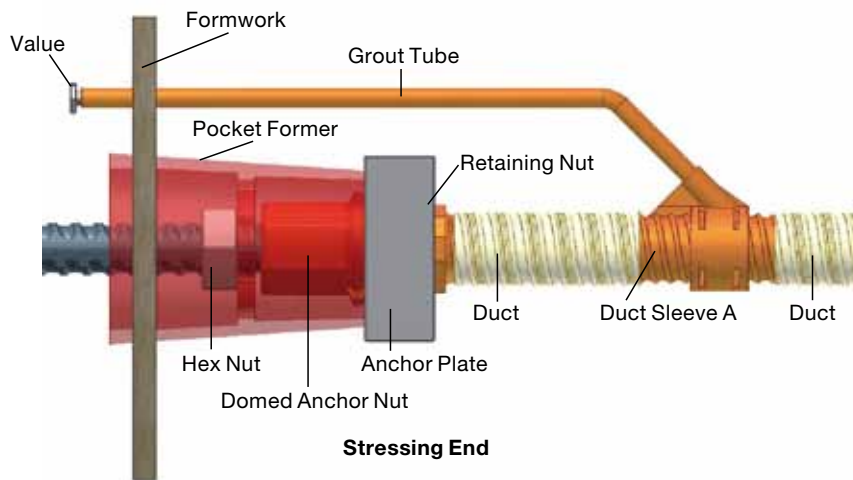

In the area of anchorage adequate space shall be accomplished through a pocket former assembled at the formwork before concreting in order to put on the jack and for the grout cap.



Jeju Port Extension, South Korea



Woodrow Wilson Bridge, Washington, D.C., USA

Stressing and Grouting

The small, light and conveniently operated DYWIDAG-Systems International jacks facilitate the stressing operation. Heavy lifting aids are generally not necessary.

The jack is pushed over a pull rod coupler that is threaded onto the bar protrusion behind the domed anchor nut. The jack is then fixed with a pulling nut.

The tension load is hydraulically transferred. The domed anchor nut is tightened by an internal wrench. The bar 47 WR has a specially equipped stressing jack.

Stressing notes

Straight tendons are generally stressed from one end only. In order to reduce friction losses (especially in draped tendons) it is recommended to stress from both sides.

The prestressing load can be adjusted up and down at any given time until the tendon is fully grouted by simply reinstalling the jack. This allows partial stressing. Several controls during and after the stressing operation check the effective stressing load:

- bar protrusion at the anchorage before and after stressing to evaluate the effective elongation
- counter control for elongation during stressing operation
- gauge control for hydraulic pressure



To comply with exceptional high demands on accuracy for example on very short tendons special accessories can be applied to minimize the influence of alignment tolerances.



Grouting


The durability of bonded post-tensioned construction depends to a great degree on the success of the grouting operation. The hardened cement grout provides bond between concrete and tensile elements as well as primary long term corrosion protection (alkaline medium) for the prestressing steel.

DYWIDAG-Systems International has developed a grouting operation that is based on highly plasticized grout with thixotropic properties, and utilizes durable grouting equipment. Advanced methods such as pressure grouting, post-grouting and vacuum grouting are all results of many years of development.


Grouting is always done from a low-point of the tendon. This can be one of the anchorages with a grout cap with grout inlet or along the tendon utilizing an intermediate grout saddle. All grouting components are threaded for easy, fast and proper connection.

Equipment for Stressing and Grouting

Tensioning jacks

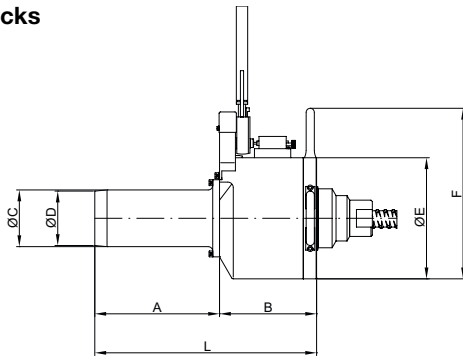

Tensioning jack 110 Mp/60 Mp

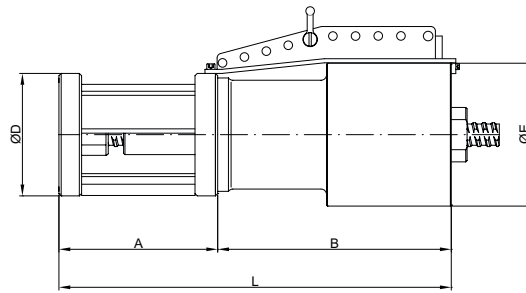

Tensioning jack HOZ 200 Mp

Dimensions (for Block-Out design)

Tensioning jacks	L	Ø E	stroke	piston area Ak	capacity	max. piston pressure	weight	A	B	Ø C	Ø D	F
	[mm]	[mm]	[mm]	[cm ²]	[kN]	[bar]	[kg]	[mm]	[mm]	[mm]	[mm]	[mm]
60 Mp Series 04	401	190	50	132.5	625	50	36	225	176	³⁾	³⁾	300
60 Mp Series 05	456	190	100	132.5	625	50	44	225	231	³⁾	³⁾	300
110 Mp Series 01	494	267	50	235.6	1,100	50	46	275	219	⁴⁾	⁴⁾	375
110 Mp Series 03	594	267	150	235.6	1,100	50	54	275	319	⁴⁾	⁴⁾	375
200 Mp	865	315	150	361.3	2,000	60	172	350	515	-	270	-

Ø C Ø D for type of bar

	Ø C [mm]	Ø D [mm]	for type of bar
3)	105	106	18 WR, 26 WR, 32 WS
	135	114	32 WR
4)	122	106	26 WR
	125	110	32 WS
	125	120	32 WR, 36 WR/WS
	134	134	40 WR



Pump Type 77-193 A



Pump Type R 6.4

Hydraulic pumps

Hydraulic pumps Tensioning jacks

	60 Mp	110 Mp	200 Mp
77-193 A	■	■	
R 3.0 V	■	■	
R 6.4	■	■	■

Pump type	max. operating pressure	oil flow rate	usable oil capacity	weight with oil ¹	dimensions L x W x H
	[bar]	[l/min]	[l]	[kg]	[mm]
77-193 A	600	3.0	10	63	420x380x480
R 3.0 V	600	3.0	13	98	600x390x750
R 6.4	600	6.4	70	310	1,400x700x1,100

1) Hydraulic pumps will be supplied without oil.

Grouting equipment (mixing and pumping)

Grouting equipment	max. injection pressure	capacity	weight	dimensions L x W x H
	[bar]	[l/h]	[kg]	[mm]
MP 2000-5	15	420	300	2,000x950x1,600



Mixer MP 2000-5



Austria

DYWIDAG-Systems
International GmbH
Alfred-Wagner-Strasse 1
4061 Pasching/Linz, Austria
Phone +43-7229-61 04 90
Fax +43-7229-61 04 980
E-mail office@dywidag-systems.at
www.dywidag-systems.at

France

DSI-Artéon
Rue de la Craz
Z.I. des Chartinières
01120 Dagneux
France
Phone +33-4-78 79 27 82
Fax +33-4-78 79 01 56
E-mail dsi.france@dywidag.fr
www.dywidag-systems.fr

Germany

DYWIDAG-Systems
International GmbH
Schuetzenstrasse 20
14641 Nauen, Germany
Phone +49 3321 44 18 0
Fax +49 3321 44 18 18
E-mail suspa@dywidag-systems.com

DYWIDAG-Systems
International GmbH
Max-Planck-Ring 1
40764 Langenfeld, Germany
Phone +49 2173 79 02 0
Fax +49 2173 79 02 20
E-mail suspa@dywidag-systems.com
www.dywidag-systems.de

DYWIDAG-Systems
International GmbH
Germanenstrasse 8
86343 Koenigsbrunn, Germany
Phone +49 8231 96 07 0
Fax +49 8231 96 07 10
E-mail geotechnik@dywidag-systems.com
www.dywidag-systems.de

DYWIDAG-Systems
International GmbH
Siemensstrasse 8
85716 Unterschleissheim, Germany
Phone +49-89-30 90 50-100
Fax +49-89-30 90 50-120
E-mail dsihv@dywidag-systems.com
www.dywidag-systems.com

Italy

DYWIT S.P.A.
Viale Europa 72 Strada A 7/9
20090 Cusago (MI), Italy
Phone +39-02-901 65 71
Fax +39-02-901 65 73 01
E-mail info@dywit.it
www.dywit.it

Netherlands

DYWIDAG-Systems
International B.V.
Veilingweg 2
5301 KM Zaltbommel, Netherlands
Phone +31-418-57 89 22
Fax +31-418-51 30 12
E-mail email@dsi-nl.nl
www.dywidag-systems.com

Poland

DYWIDAG-SYSTEMS
INTERNATIONAL Sp. z o.o.
ul. Przywidzka 4/68
80-174 Gdansk, Poland
Phone +48-58-300 13 53
Fax +48-58-300 13 54
E-mail dsi-polska@dywidag-systems.com
www.dywidag-systems.pl

Portugal

DYWIDAG SISTEMAS
CONSTRUCTIVOS, SA
Rua D. Manuel I, n.º24 A
Quinta da Parreirinha
2695-003 Bobadela (Loures), Portugal
Phone +351-21-89 22 890
Fax +351-21-89 22 899
E-mail dywidag@dywidag-sistemas.com

Spain

DYWIDAG SISTEMAS
CONSTRUCTIVOS, S.A.
Avd/de la Industria, 4
Pol. Ind. la Cantuena
28947 Fuenlabrada (Madrid), Spain
Phone +34-91-642 20 72
Fax +34-91-642 27 10
E-mail dywidag@dywidag-sistemas.com
www.dywidag-sistemas.com

United Kingdom

DYWIDAG-Systems
International Ltd.
Northfield Road
Southam, Warwickshire
CV47 0FG, Great Britain
Phone +44-1926-81 39 80
Fax +44-1926-81 38 17
E-mail sales@dywidag.co.uk
www.dywidag.co.uk

AUSTRIA
ARGENTINA
AUSTRALIA
BELGIUM
BOSNIA AND HERZEGOVINA
BRAZIL
CANADA
CHILE
COLOMBIA
COSTA RICA
CROATIA
CZECH REPUBLIC
DENMARK
EGYPT
ESTONIA
FINLAND
FRANCE
GERMANY
GREECE
GUATEMALA
HONDURAS
HONG KONG
INDONESIA
ITALY
JAPAN
KOREA
LEBANON
LUXEMBOURG
MALAYSIA
MEXICO
NETHERLANDS
NORWAY
OMAN
PANAMA
PARAGUAY
PERU
POLAND
PORTUGAL
QATAR
SAUDI ARABIA
SINGAPORE
SOUTH AFRICA
SPAIN
SWEDEN
SWITZERLAND
TAIWAN
THAILAND
TURKEY
UNITED ARAB EMIRATES
UNITED KINGDOM
URUGUAY
USA
VENEZUELA

Please note:

This brochure serves basic information purposes only. Technical data and information provided herein shall be considered non-binding and may be subject to change without notice. We do not assume any liability for losses or damages attributed to the use of this technical data and any improper use of our products. Should you require further information on particular products, please do not hesitate to contact us.

www.dywidag-systems.com